



FIGURE-1
10

FIG. 1 is a cross-sectional view of the device in a first position, and FIG. 2 is a cross-sectional view of the device in a second position.


FIGURE - 2

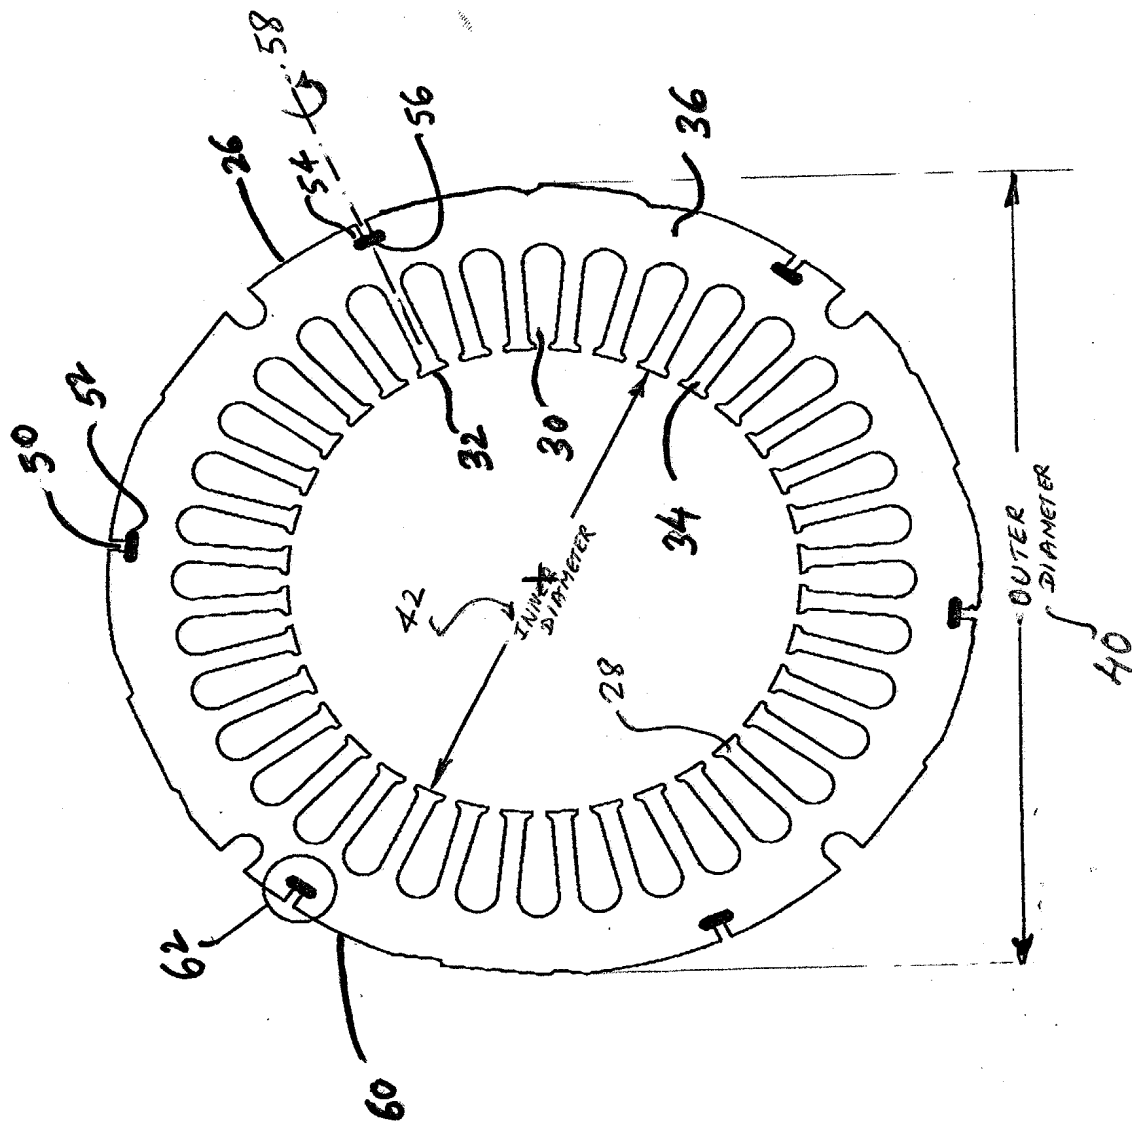

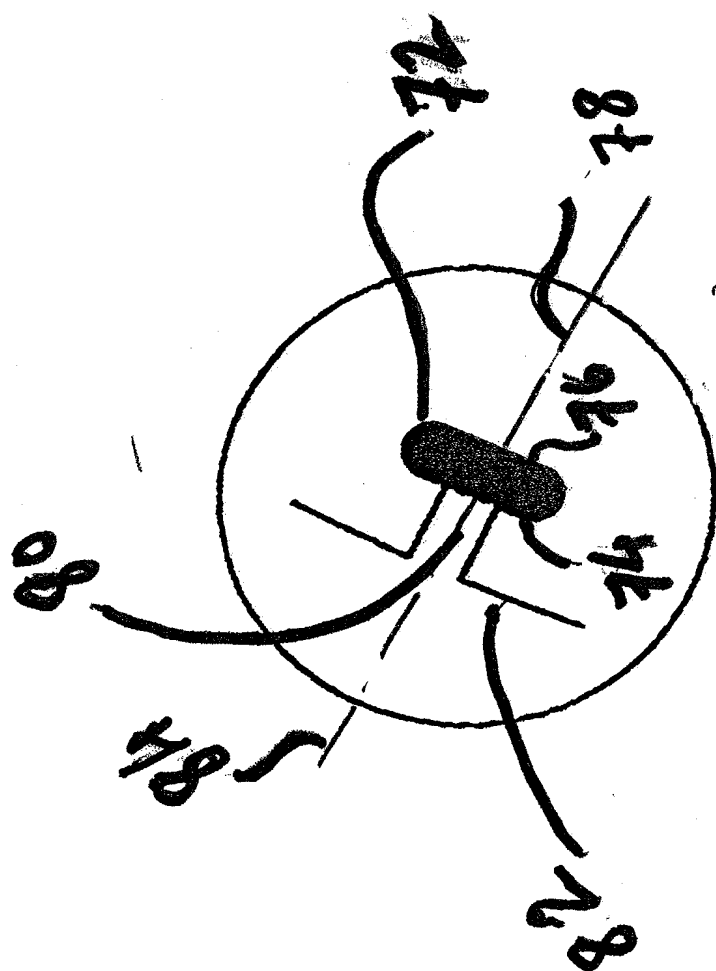

64

FIGURE-3

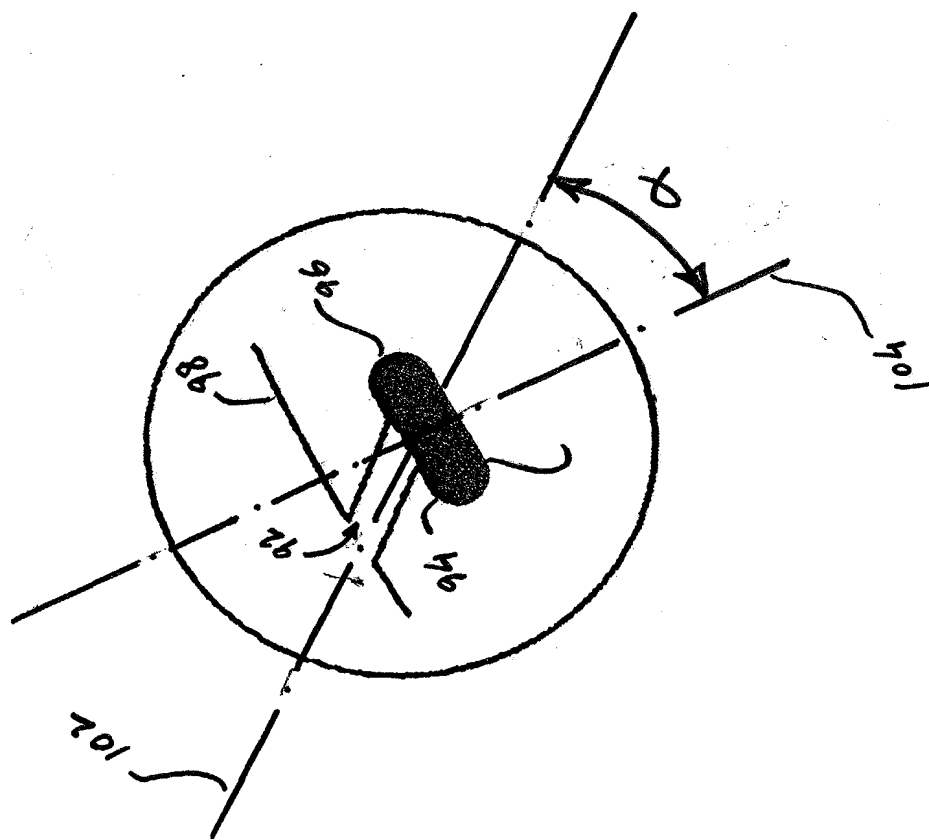

90

FIGURE- 4

FIG. 5 is a top view of the device of FIG. 1, showing the circular base 120 and the central component 130. The base 120 is defined by a dashed line 124, and the central component 130 is a shaded rectangular area. The dashed line 124 is labeled 128 at its ends. The central component 130 is labeled 132 at its ends. The dashed line 124 is also labeled 124 at its ends.

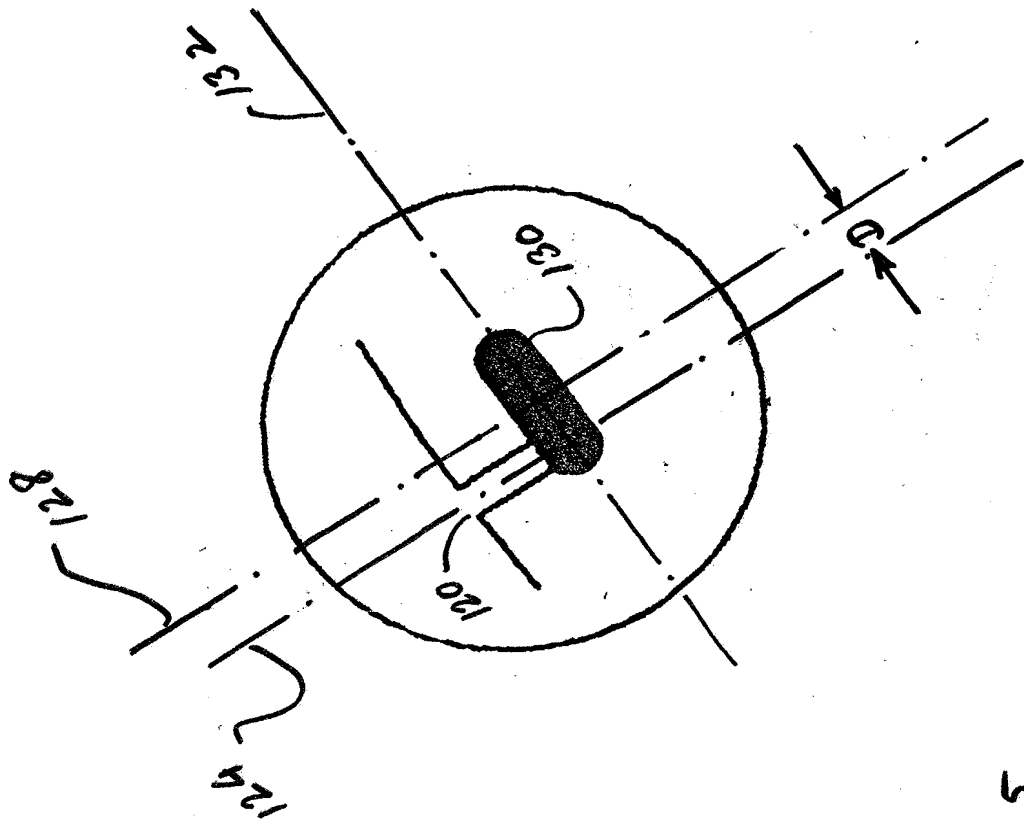


FIGURE 5

140
↖

FIGURE-6

Side View of Peripheral Interlocks in a Stator Core.

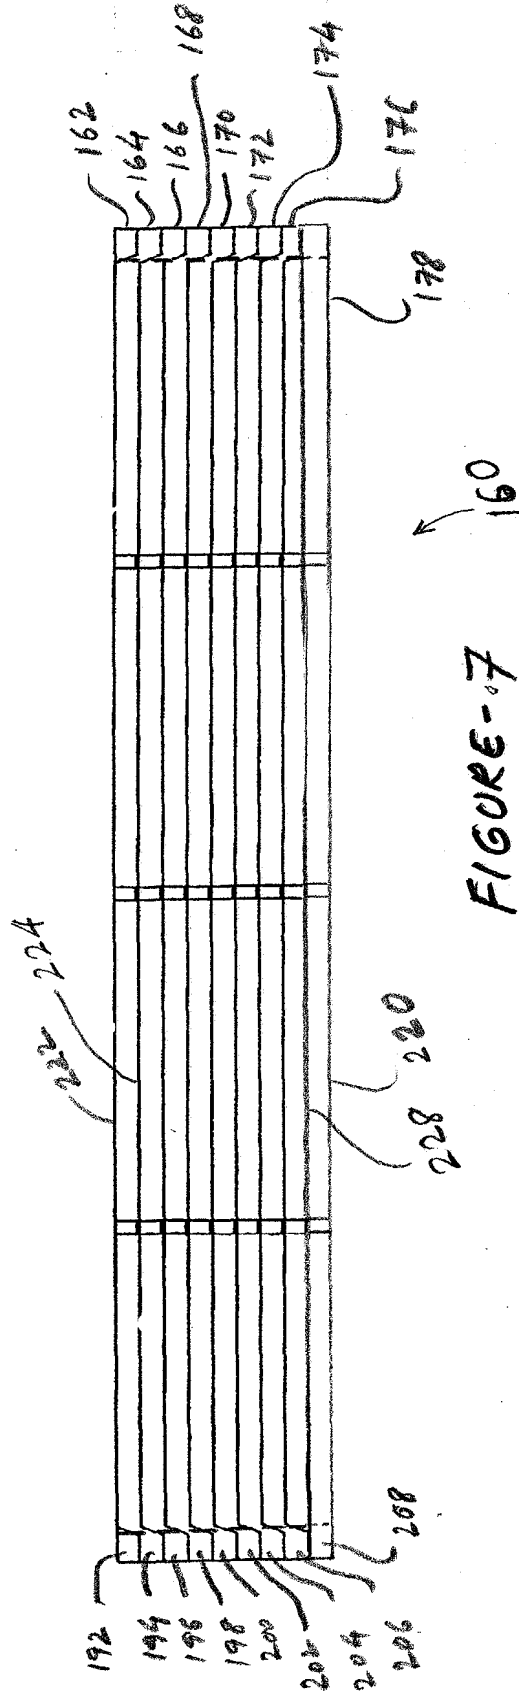


FIGURE-7